



CERAMIC METAL HALIDE
CMH630 DE/UVC/U/930 III/DOUBLE JACKETED


PERFORMANCE DATA		
Initial lumens at rated watts after 100 hours operation	70000	lm
Rated average life	12000	Hours
Correlated color temperature	3000	K
Color rendering index	90+	
Operating Position	HOR	
PAR Value	1250	μmol/s



ELECTRICAL CHARACTERISTICS		
Nominal lamp wattage	630	W
Nominal lamp voltage	195	V
Nominal lamp current	3.2	A

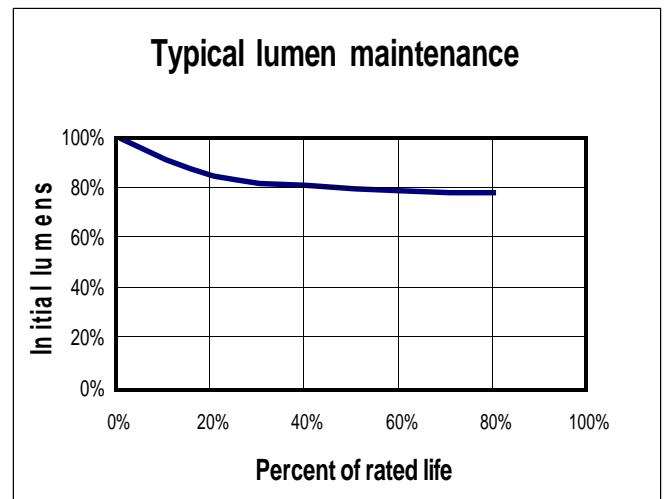


PHYSICAL DESCRIPTION		
Maximum overall length	394	mm
Light center length	/	mm
Maximum Bulb diameter	35	mm
Bulb designation	T34	
Bulb material	UV block quartz	
Arc tube material	PCA	
Bulb finish	Clear	
Base designation	Double ended	

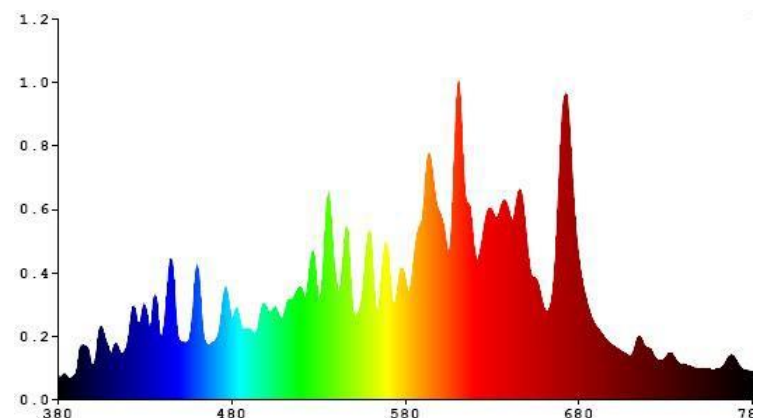


CERAMIC METAL HALIDE CMH630 DE/UVC/U/942 III/DOUBLE JACKETED

PERFORMANCE DATA		
Initial lumens at rated watts after 100 hours operation	72000	lm
Rated average life	12000	Hours
Correlated color temperature	4200	K
Color rendering index	90+	
Operating Position	HOR	
PAR Value	1200	μmol/s



ELECTRICAL CHARACTERISTICS		
Nominal lamp wattage	630	W
Nominal lamp voltage	195	V
Nominal lamp current	3.2	A

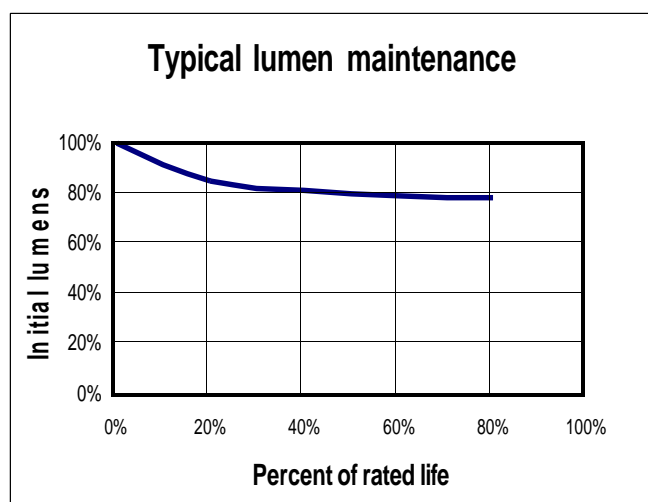

PHYSICAL DESCRIPTION		
Maximum overall length	394	mm
Light center length	/	mm
Maximum Bulb diameter	35	mm
Bulb designation	T34	
Bulb material	UV block quartz	
Arc tube material	PCA	
Bulb finish	Clear	
Base designation	Double ended	

